

COLD WATER H.P. CLEANER
IDROPULITRICE AD ACQUA FREDDA**MAXI** 4-5

*Industrial cold water high pressure washer.
Top efficiency for large jobs.*

*Handy, easy to use, with a flow and pressure
able to cope with the most challenging and
resistant situations.*

*Sturdiness, attractive design and durability
are guaranteed by a shimmed painted steel
frame and a stainless steel cover.*

Classe Industriale ad acqua fredda al
massimo livello.

Il top dell'efficienza per i grandi lavori.
Maneggevole, semplice da utilizzare ma
con una portata e una potenza in grado
di far fronte alle situazioni più impegnative
e resistenti.

Robustezza, design e lunga durata nel
tempo sono garantiti da un telaio in acciaio
spessorato verniciato e da una cofanatura
in acciaio inox.



Industrial triplex pumps with ceramic plungers connecting rod system and brass head.
Pressure gauge (Maxi 5 - 1000 bar)
Pressure regulator
(600 bar in stainless steel AISI 304 Maxi 5).

Pompa professionale con testa in ottone e pistoni in ceramica.
Manometro (Maxi 5 - 1000 bar).
Regolazione della pressione (valvola inox 600 bar Maxi 5).


IE2 High efficiency electric Motor.
Motore elettrico ad alta efficienza IE2.
400/690 V / 50 Hz Standard
60 Hz Su richiesta / On request

5 mt. electric cable
Cavo elettrico da 5 mt.


Parking brake.
Freno di stazionamento.



STANDARD ACCESSORIES ACCESSORI STANDARD

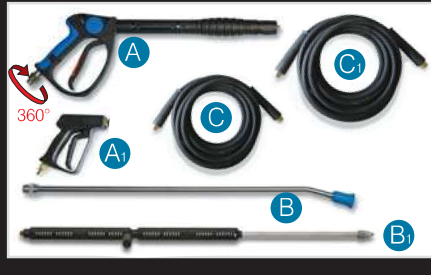

Electric panel.
Quadro elettrico.

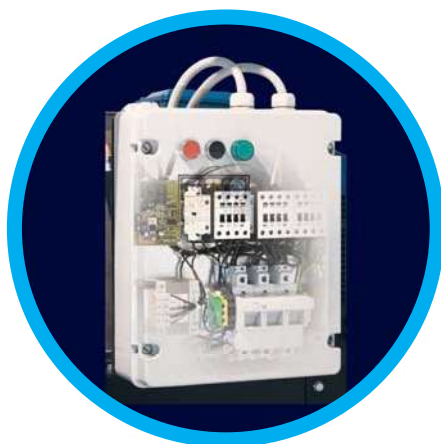

Standard for Maxi 4
Optional for Maxi 5

TSI security system including: (A) time delayed auto stop start; (B) stop after 1 hour in total stop; (C) stop for leak detection; (D) stop for lack of water; (E) stop in case of motor over-heating - error signal indicated by warning lights.

Comando a distanza TSI (Total Stop Intelligente) con funzioni: (A) total stop temporizzato; (B) arresto dopo 1 ora di total stop; (C) arresto per microperdite; (D) arresto per mancanza acqua; (E) arresto per surriscaldamento motore - segnalaz. d'errore tramite spia intermittente.

Safety valve (Maxi 4 standard - optional Maxi 5).

Valvola di sicurezza (Maxi 4 standard - Maxi 5 optional).

Flexible coupling with steel protection (Maxi 5).

Giunto elastico con protezione (Maxi 5).

Flexible coupling with flange (Maxi 4).

Flangia e giunto elastico (Maxi 4).

Stainless steel water tank for cooling the pump head (Maxi 5 AST, Maxi 4 optional)

Vaschetta acqua inox per raffreddamento testata (Maxi 5 AST, Maxi 4 optional).

- A Maxi 4 Gun / Pistola Maxi 4 (up to / fino a 350 bar - cod. 6600600)
- A1 Maxi 4-5 Gun / Pistola Maxi 5 (500 bar - cod. P30540000)
- B Maxi 4 Lance / Lancia Maxi 4 (up to / fino a 350 bar - cod. 6600610)
- B1 Maxi 4-5 Lance / Lancia Maxi 5 (500 bar - cod. P30500092)
- C Maxi 4 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 4 (up to / fino a 350 bar - cod. 6000145)
- C1 Maxi 4-5 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 5 (500 bar - cod. 6500135)



Shoulder rest / Controspalla (cod. P30506000)

Optional only for / solo per

SXW350.21 T-AST-TSI

W150.50 T-AST-TSI

MAXI 4	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza HP	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso kg	Box dimensions Dimensione scat. LxWxH (cm)	Pallet q.ty Qtà pallet	Q.ty per container Qtà per container		Machine dimensions Dimensione macchina LxWxH (cm)
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft	
SXW350.21 T-AST-TSI	94500126	350	5.100	1.260	333						215					
SHP500.15 T-AST-TSI	94500149	500	7.250	900	238	20	160IE2	1.450	60	140	280	146x89x107	2	16	32	140x82x90
W150.50 T-AST-TSI	94500147	150	2.200	3.000	793						280					

MAXI 5	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza HP	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso kg	Box dimensions Dimensione scat. LxWxH (cm)	Pallet q.ty Qtà pallet	Q.ty per container Qtà per container		Machine dimensions Dimensione macchina LxWxH (cm)
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft	
SHP500.22 T-AST	94500160	500	7.250	1.320	349	30	180IE2	1.450	60	140	335	146x89x107	2	16	32	140x82x90
SHP500.22 T-AST-TSI	94500165	500	7.250	1.320	349											

Pump type - Tipo pompe **SXW - SHP** **A.R.** **W** **I.P.** T=3~ **AST** = Star triangle soft start - Avviamento stella triangolo
TSI = Intelligent Total Stop - Arresto Totale Intelligente

OPTIONAL ACCESSORIES ACCESSORI OPTIONAL



500 bar inox
rotating nozzle
Ugello rotante
500 bar inox



350 bar rotating
nozzle
Ugello rotante
350 bar



Sand blasting head 500 bar
round jet
Testina sabbiante 500 bar a
getto tondo + sonda + tubo